

CORE GATEWAY - ROUTER

Simplest for building network infrastructure, controlling clients and access points!

This is product illustration, appearance can change by different regions.



Guépard GAC7000 *New*
NEW ADVANCED TECHNOLOGY

*Security Gateway * Smart QoS * Wi-Fi Controller*

256 end users / 50,000 sessions

Using Multi-purpose



PRIVATE

PUBLIC

GENERALITY

INDUSTRY

OFFICE

GAC7000 is a small-medium scale SMB Core Gateway router - Load balance - AP controller - Firewall device with **05 Gigabit ports**. **GAC7000** can work as a core router, controller and authentication portal which can manage, control and monitor simultaneous **256 clients** and **256 wireless access points** in networking diagram at the same time. So **GAC7000** is a very easy choice to set up and manage your basis networks that keep the whole networks running fast, stability and security.

Core Gateway Router - Load balance - Basic Firewall Appliance



GAC7000 with metal case and lightning protected connector which help administrator set up easily with more safety and stability while running.



A. Gigabit multi-WAN ports for high speed broadband router and Line back-up

- *Factory default include: 1 Gigabit WAN port, 4 Gigabit LAN ports, high-speed data transmission. However, administrator can customize quantity of WAN/LAN ports for their real network demand.*
- *Line back-up: Router can automatically switch to other WAN ports for transmitting data when other WAN port is interrupted, which will enhance the reliability of your network.*
- *Multi-broadband overlay so multi-ISP line can access at the same time, automatic rational use of the bandwidth, reducing the cost of operation; Support intelligent load balancing; optimized the number of users, network traffic, wireless signal effectively balanced, sharing the broadband on equipment equally and no blocking, zero off-line, enhance the user Internet experience.*

B. Multi-in-one network flow control

- *Integrated router, flow control, load balancing, firewall, behavior management, VPN functions all in one, one device can create multiple solutions to reduce equipment cost; Zero configuration, simple deployment, easy installation, efficient maintenance.*

C. Precision intelligent DPI (Deep Packet Inspection) seventh-layer flow control function, AI automatic learning and continuous automatic optimization of the network

- *Simple and easy in the intelligent flow control function with just only one switch on.*
- *Recognition technology based on traffic size and traffic characteristics, calculations of dealing with fairness and control network delay.*
- *Support IP-shunt and session-shunt, bandwidth overlay and no dropping off at the same time. Powerful shunt rules based on combination of IP address, time, port, routing table, application, shunt and weight, meet with various shunt requirements.*

D. Broadband control policy

- Rules for IP address, authenticated user, user level, user department and time conditions, it can be precise limit the maximum traffic and the maximum number of TCP and UDP connections of users per line. In the case of tight broadband, it can automatically apply priority, as games and web pages should have priority, P2P downloads will not affect the on line experience.

E. Flexible firewall module, controlling intranet information security

- Firewall module run on 7 layers OSI can configure or organize to address, user, level, department cooperation time, destination address and destination port.
- Policy can be carried out for delegated applications, designated parts and delegated external network lines.
- Integrated port mapping, source address translation, extend protection to every port of the router and enable the ports to provide DoS/DDoS attack protection.
- IP-MAC Binding Function to prevent Intranet ARP Attacks.
- Prohibit ping router from extranet, close telnet service, setting service port/physical port/DNS/deny log in remotely via extranet IP.

F. Automatic detection and unified management wireless AP (up to 64PCS wireless AP can be managed) and 80 end users accessing.

- Automatic detecting of all APs working in thin AP (FIT AP) mode, and unified configuration and management of AP with zero-configuration.
- Support accurate seamless roaming and intelligent channel analysis, support manual adjustment of AP transmission RF power, reduce mutual WiFi interference between AP, improve the wireless network quality.
- Support load balancing based on the number of access users. Through policy rules, Controller can dynamically adjust the uniform distribution of users between different APs.

G. Multiple User Access Authentication

- Support VPN, private network with encrypted communication for the security of remote access.
- Support wireless marketing function (Landing page) with Portal authentication and WEB authentication to meet the needs of different users and different scenarios.
- Support remote centralized management and maintenance across regions.
- Support managing manual DSL (manual Digital Subscriber Line) with PPPoE Authentication for PPPoE users.

H. Behavior Management


- Support Behavior management can completely block P2P software, P2P flow control and broadband distribution, manage file transmission and fully control illegal web site surfing network behavior effectively.

I. Smart QoS Policy

- Through IP-based network traffic speed limit mechanism and NAT table restriction mechanism, it can control the excessive occupation of network width by P2P software such as BT effectively.
- Support QoS policy configuration for IP segment/ IP range in a shared and exclusive manner in a specific time period to meet user's flexible business configuration requirements.

Convention GUI and Convenient settings

GAC7000 integrated friendly graphic user interface management (*Web based*) which combined with graphics and instructions, more convenience and useful for controlling and configuring appliance;

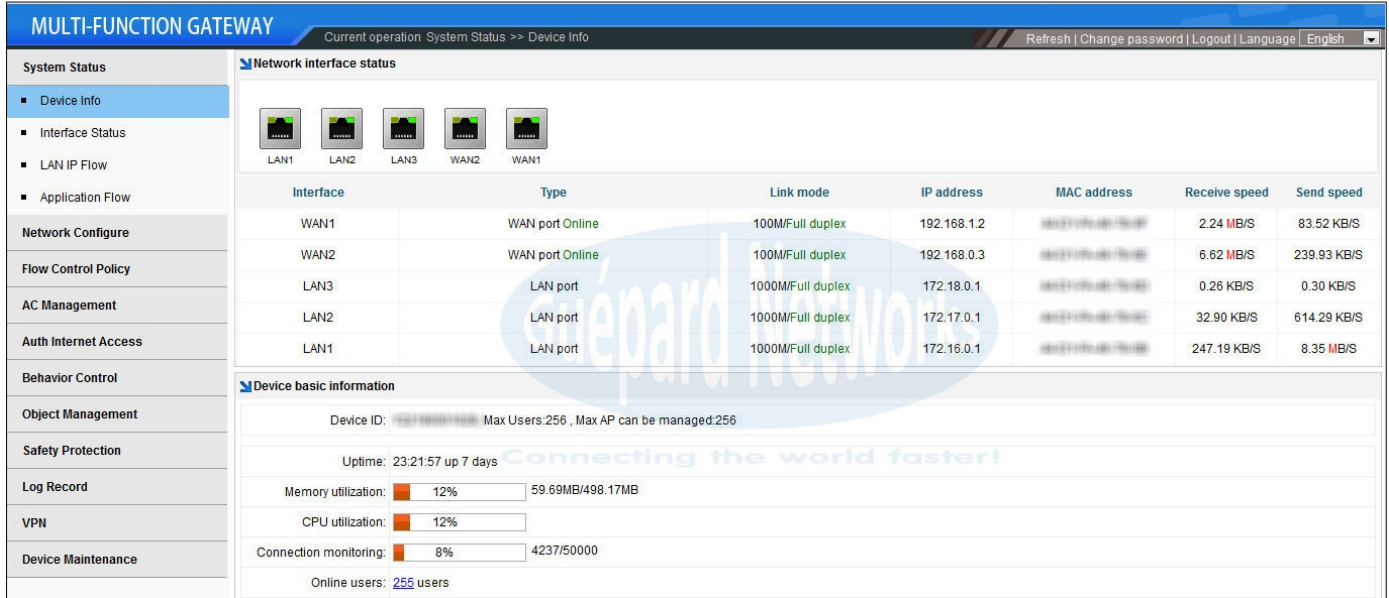

MULTI-FUNCTION GATEWAY Current operation System Status >> Device Info Refresh | Change password | Logout | Language | English

System Status

- Device Info
- Interface Status
- LAN IP Flow
- Application Flow

Network Configure

Flow Control Policy

AC Management

Auth Internet Access

Behavior Control

Object Management

Safety Protection

Log Record

VPN

Device Maintenance

Network interface status

Interface	Type	Link mode	IP address	MAC address	Receive speed	Send speed
WAN1	WAN port Online	100M/Full duplex	192.168.1.2	88:63:17:48:74:82	2.24 MB/S	83.52 KB/S
WAN2	WAN port Online	100M/Full duplex	192.168.0.3	88:63:17:48:74:82	6.62 MB/S	239.93 KB/S
LAN3	LAN port	1000M/Full duplex	172.18.0.1	88:63:17:48:74:82	0.26 KB/S	0.30 KB/S
LAN2	LAN port	1000M/Full duplex	172.17.0.1	88:63:17:48:74:82	32.90 KB/S	614.29 KB/S
LAN1	LAN port	1000M/Full duplex	172.16.0.1	88:63:17:48:74:82	247.19 KB/S	8.35 MB/S

Device basic information

Device ID: [REDACTED] Max Users:256, Max AP can be managed:256

Uptime: 23:21:57 up 7 days


Memory utilization: 12% 59.69MB/498.17MB

CPU utilization: 12%

Connection monitoring: 8% 4237/50000

Online users: [255](#) users

Management interface of GAC7000 listing detail network interfaces, users, clients, flows, routes ... lively and clearly.

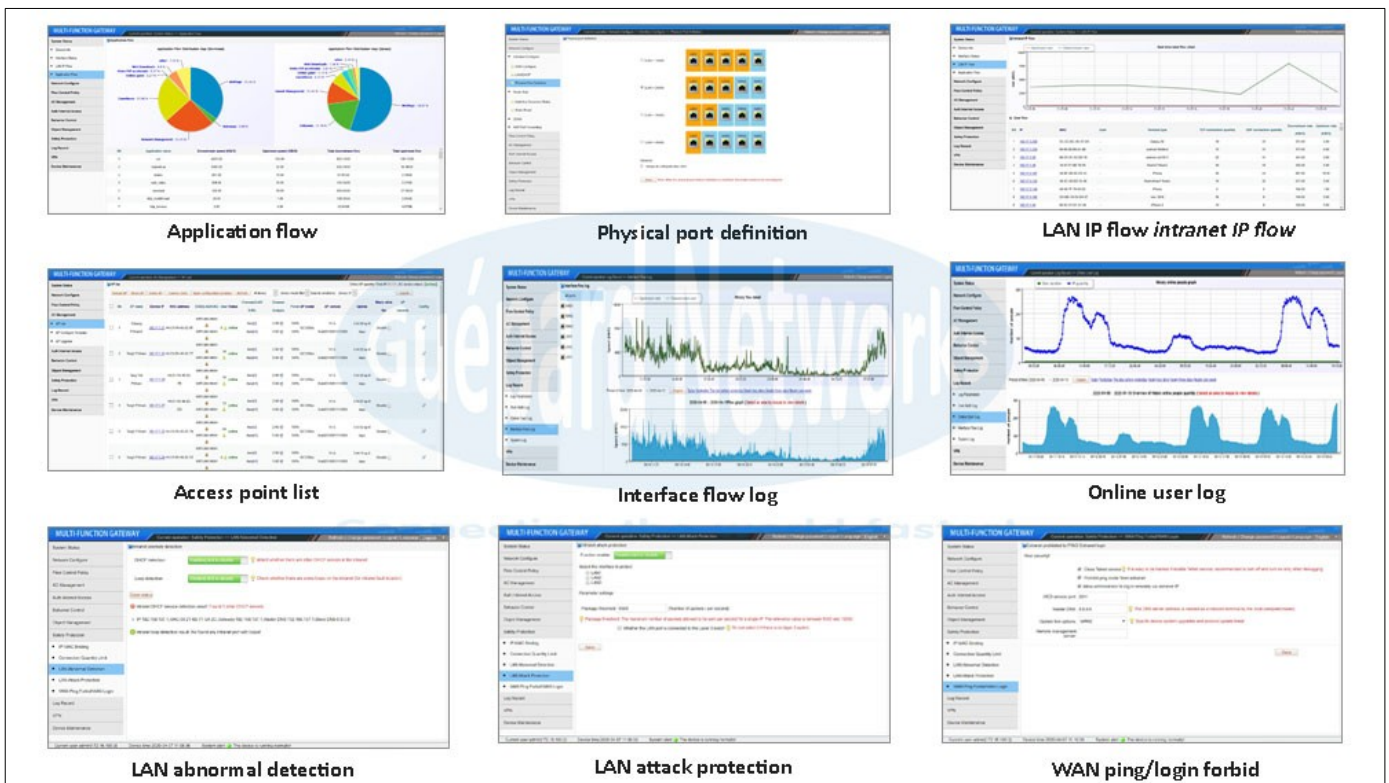

Application flow

Physical port definition

LAN IP flow intranet IP flow

Access point list

Interface flow log



Online user log

LAN abnormal detection

LAN attack protection

WAN ping/login forbid

Network topology

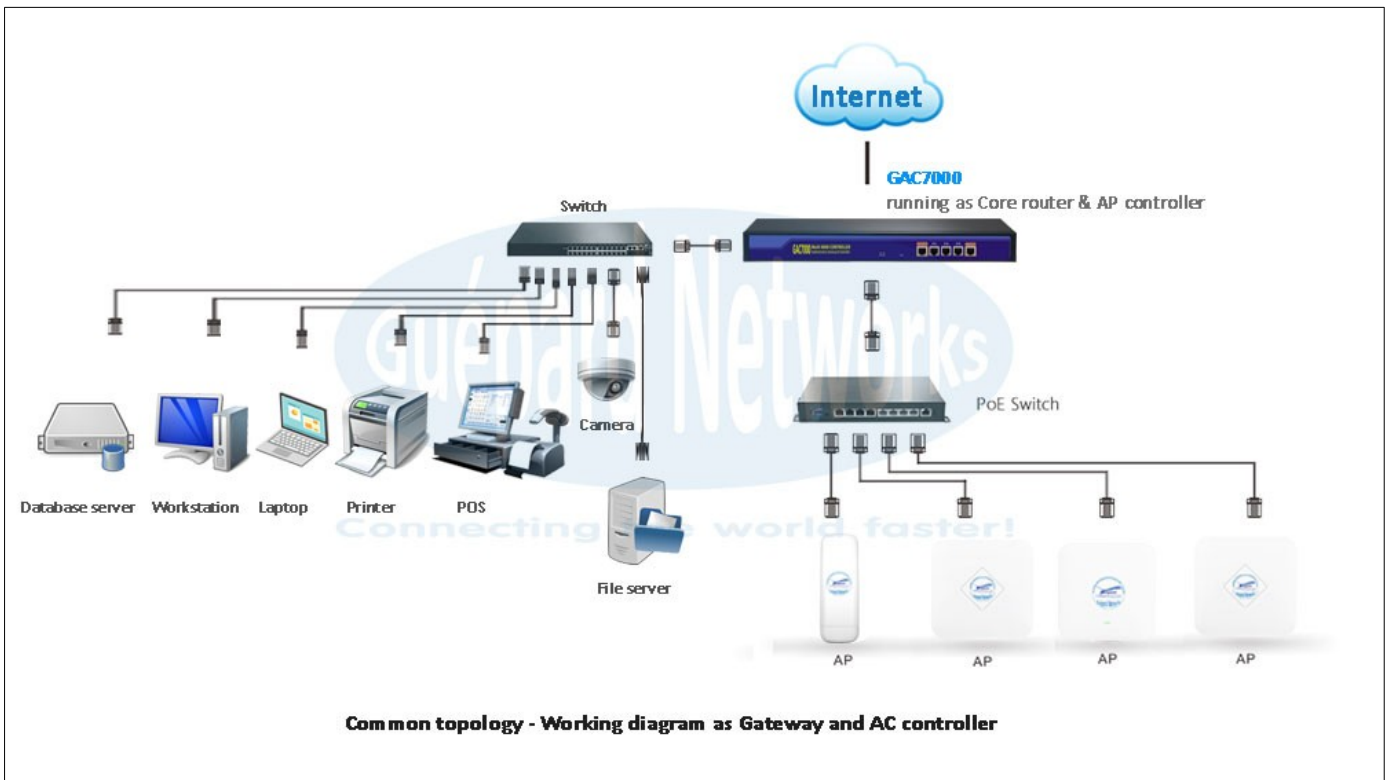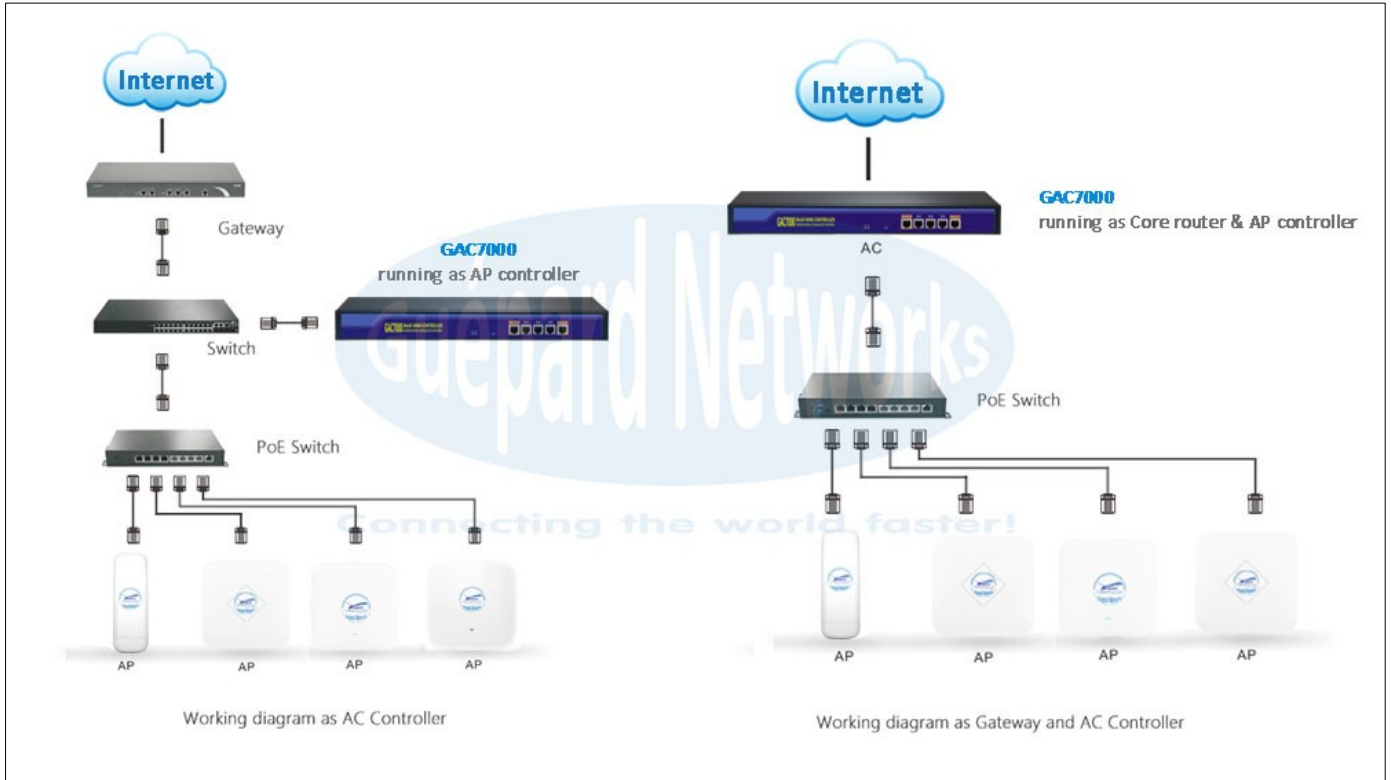

GAC7000 can run as standalone Industrial core router or AP controller or both. It's belong to requirement and your current network status.

Specification

HARDWARE	
CPU	MTK 880 MHz <i>MISP® 1004Kc™</i> (Dual-core CPU)
Flash/Memory	16 MB/512 MB DDR2 RAM
Interface (5 x Gigabit Ethernet Port)	Reset button: press longer for factory settings
	LAN Port: 4 x 10/100M/1000M RJ45 port (Auto MDI/MDIX)
	WAN Port: 1 x 10/100M/1000M RJ45 port (Can up to 04 WAN ports with physical port definition function)
LED Indicator	Power: On
	Run: System status
Cooling	Metal cover cooling, fan cooling
Power/Power Consumption	100-240V ~ 50/60Hz ~ 10W with lightning protected connector
Size/ Weight	1U Rack: 440 mm X 220 mm X 44 mm; ~3.0 Kg
MANAGEMENT	
Core Gateway Router	Capacity: Recommended 50,000 sessions With full WAN/LAN Settings and Route rule
Centralized management	Centralized management ability (Auto detecting wireless APs) Max: 256 APs Max: 256 end users
System Settings	Web-based configuration (Friendly GUI)
System monitoring	Monitor clients/users/AP status in real-time; tracking clients/users/AP operations on system everytime and everywhere; auto-inspection AP's working status (up or down), show each clients/users/AP status under control panel page;
QoS	Status/ Setup upstream & downstream bandwidth/ IP range of bandwidth/MAC/ Max bandwidth smart/rules/free; Bandwidth limitation: IP-based bandwidth limitation, Safeguard/Restrict bandwidth;
Security	IP/Port Filtering; MAC Filtering; URL Filtering; Port Forwarding; DMZ Settings; Intranet attack protection; Extranet prohibited to PING/ Extranet login; DHCP/Loop Detection, ARP defense
Temperature	Working: 0°C~50°C/ Storage: 0°C to 70°C
Humidity	Storage Humidity : 5%~90%RH (No condensation)
TECHNOLOGY & QUALITY	
NEW ADVANCED TECHNOLOGY INTEGRATED BY MANY WORLD FAMOUS NETWORK PRODUCT PROPRIETIES	
24 MONTHS WARRANTY POLICY AND SUPPORT SERVICE	
100% PRODUCTS CHECKED TWICE BEFORE RELEASE FACTORY	
GUÉPARD NETWORKS™ Inspired of French	
ALL COMPONENTS AND ACCESSORIES SUPPLIED BY PRESTIGE MANUFACTURERS (QUALCOMM, INTEL, MEDIATEK, TDK ...)	
Assemble in China	
PACKAGE	
Guépard GAC7000 complete set/ Power cable/ Rack mount kit	



Connecting the world faster!